

Click [here](#) to ask about the production status of specific part numbers.

MAX14933

Two-Channel, 2.75kV_{RMS} I²C Isolator

General Description

The MAX14933 is a two-channel, 2.75kV_{RMS} I²C digital isolator utilizing Maxim's proprietary process technology. For applications requiring 5kV_{RMS} of isolation, refer to the MAX14937 data sheet. The MAX14933 transfers digital signals between circuits with different power domains at ambient temperatures up to +125°C.

The device offers two bidirectional, open-drain channels for applications, such as I²C, that require data to be transmitted in both directions on the same line. To prevent latch-up action, the A-side outputs comprise special buffers that regulate the logic-low voltage at 0.9V (max), and the input logic-low threshold is at least 50mV lower than the output logic-low voltage. The B side features conventional buffers that do not regulate logic-low output voltage.


The device features independent 2.25V to 5.5V supplies on each side of the isolator. The device operates from DC to 1.7MHz and can be used in isolated I²C busses with clock stretching.

The MAX14933 is available in both a 16-pin wide-body (10.3mm x 7.5mm) and narrow-body (9.9mm x 3.9mm) SOIC package. All devices are rated for operation at ambient temperatures of -40°C to +125°C.

Applications

- I²C, SMBus, PMBus™ Interfaces
- Power Supplies
- Battery Management
- Instrumentation

Functional Diagram

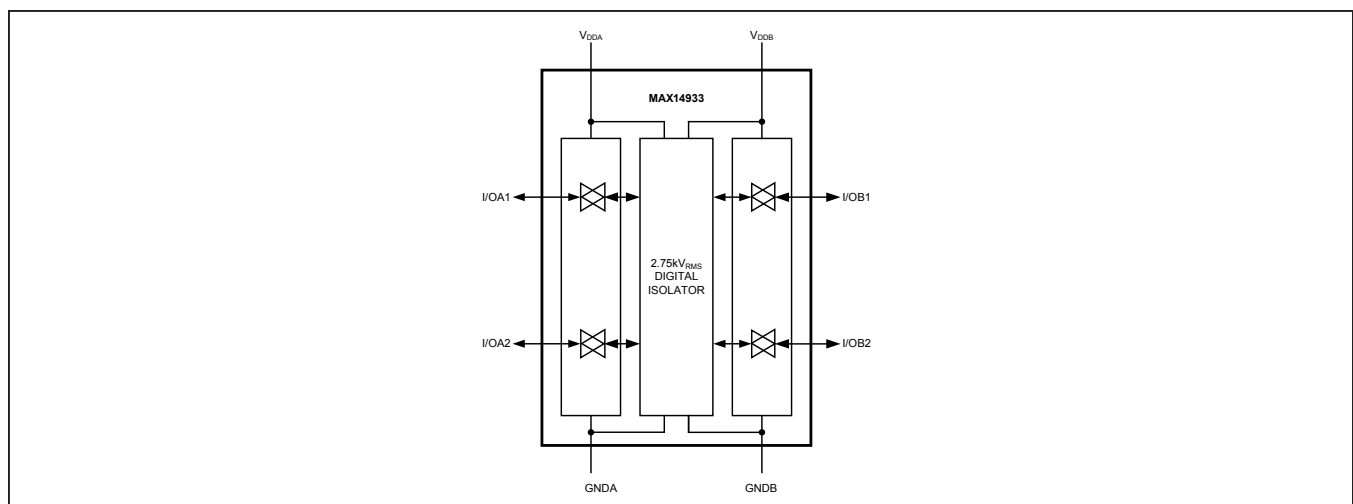

PMBus is a trademark of SMIF, Inc.

Benefits and Features

- Robust Galvanic Isolation of Digital Signals
 - Withstands 2.75kV_{RMS} for 60s (V_{ISO})
 - Continuously Withstands 443V_{RMS} (V_{IOWM})
 - 630V_{PEAK} Repetitive Peak Voltage (V_{IORM})
 - Withstands ±10kV Surge per IEC 61000-4-5
 - 2 Packages (4mm or 8mm Creepage and Clearance)
- Interfaces Directly with Most Micros and FPGAs
 - Accepts 2.25V to 5.5V Supplies
 - Bidirectional Data Transfer from DC to 1.7MHz
- Low Power Consumption
 - 5.3mA per Channel Typical at 1.7MHz

Safety Regulatory Approvals

- UL According to UL1577
- cUL According to CSA Bulletin 5A
- VDE 0884-11 Basic Insulation

Ordering Information appears at end of data sheet.

Absolute Maximum Ratings

V_{DDA} to G_{NDA}.....-0.3V to +6V
 V_{DDB} to G_{NDB}.....-0.3V to +6V
 I/OA₋ to G_{NDA}.....-0.3V to +6V
 I/OB₋ to G_{NDB}.....-0.3V to +6V
 Short-Circuit Duration
 (I/OA₋ to G_{NDA}, I/OB₋ to G_{NDB})Continuous

Continuous Power Dissipation (T_A = +70°C)
 Wide SOIC (derate 14.1mW/°C above +70°C) 1126.8mW
 Narrow SOIC (derate 20mW/°C above +70°C)..... 1600mW
 Operating Temperature Range..... -40°C to +125°C
 Maximum Junction Temperature +150°C
 Storage Temperature Range..... -65°C to +150°C
 Lead Temperature (soldering, 10s) +300°C
 Soldering Temperature (reflow) +260°C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Package Information

16 Wide SOIC

| | |
|---|-------------------------|
| Package Code | W16M+8 |
| Outline Number | 21-0042 |
| Land Pattern Number | 90-0107 |
| THERMAL RESISTANCE, FOUR-LAYER BOARD | |
| Junction to Ambient (θ _{JA}) | 71°C/W |
| Junction to Case (θ _{JC}) | 23°C/W |

16 Narrow SOIC

| | |
|---|-------------------------|
| Package Code | S16M+11 |
| Outline Number | 21-0041 |
| Land Pattern Number | 90-0442 |
| THERMAL RESISTANCE, FOUR-LAYER BOARD | |
| Junction to Ambient (θ _{JA}) | 50°C/W |
| Junction to Case (θ _{JC}) | 8°C/W |

For the latest package outline information and land patterns (footprints), go to www.maximintegrated.com/packages. Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

Package thermal resistances were obtained using the method described in JEDEC specification JESD51-7, using a four-layer board. For detailed information on package thermal considerations, refer to www.maximintegrated.com/thermal-tutorial.

DC Electrical Characteristics

($V_{DDA} - V_{GNDA} = +2.25V$ to $+5.5V$, $V_{DDB} - V_{GNDB} = +2.25V$ to $+5.5V$, $T_A = -40^{\circ}C$ to $+125^{\circ}C$, unless otherwise noted. Typical values are at $V_{DDA} - V_{GNDA} = +3.3V$, $V_{DDB} - V_{GNDB} = +3.3V$, $V_{GNDA} = V_{GNDB}$, $T_A = +25^{\circ}C$, unless otherwise noted.) (Note 1) (Note 2)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|---|------------------|--|------------------|-----|-----------------|---------|
| POWER SUPPLY | | | | | | |
| Operating Supply Voltage | V_{DDA} | Relative to GNDA | 2.25 | | 5.5 | V |
| | V_{DDB} | Relative to GNDB | 2.25 | | 5.5 | V |
| Undervoltage-Lockout Threshold | $V_{UVLO_}$ | V_{DD} rising | 1.7 | 2.0 | 2.2 | V |
| Undervoltage-Lockout Threshold Hysteresis | V_{UVLO_HYST} | | | 85 | | mV |
| Supply Current | I_{DDA} | Side A, all channels DC or 1.7MHz | $V_{DDA} = 5V$ | 6 | 9 | mA |
| | | | $V_{DDA} = 3.3V$ | 6 | 9 | |
| | | | $V_{DDA} = 2.5V$ | 5.9 | 9 | |
| | I_{DDB} | Side B, all channels DC or 1.7MHz | $V_{DDB} = 5V$ | 4.8 | 8 | |
| | | | $V_{DDB} = 3.3V$ | 4.8 | 8 | |
| | | | $V_{DDB} = 2.5V$ | 4.7 | 8 | |
| Static Output Loading | $I_{I/OA_}$ | Side A | 0.5 | | 3 | mA |
| | $I_{I/OB_}$ | Side B | 0.5 | | 30 | |
| LOGIC INPUTS AND OUTPUTS | | | | | | |
| Input High Voltage | V_{IH} | $V_{I/OA_}$ relative to GNDA | 0.7 | | | V |
| | | $V_{I/OB_}$ relative to GNDB | 0.7 x V_{DDB} | | | |
| Input Low Voltage | V_{IL} | $V_{I/OA_}$ relative to GNDA | | | 0.5 | V |
| | | $V_{I/OB_}$ relative to GNDB | | | 0.3 x V_{DDB} | |
| Input/Output Logic-Low Level Difference | $DV_{I/OL}$ | $I_{I/OA_}$ (Note 3), $V_{OL} - V_{IL}$ | 50 | | | mV |
| Output Voltage Low | V_{OL} | $V_{I/OA_}$ relative to GNDA, $I_{I/OA_} = 3mA$ sink | 600 | | 900 | mV |
| | | $V_{I/OA_}$ relative to GNDA, $I_{I/OA_} = 0.5mA$ sink | 600 | | 850 | |
| | | $V_{I/OB_}$ relative to GNDB, $I_{I/OB_} = 30mA$ sink | | | 400 | |
| Leakage Current | I_L | $I_{I/OA_} = V_{DDA}$, $I_{I/OB_} = V_{DDB}$ | -1 | | +1 | μA |
| Input Capacitance | C_{IN} | $I_{I/OA_}$, $I_{I/OB_}$, $f = 1MHz$ | | 5 | | pF |

Dynamic Characteristics

($V_{DDA} - V_{GNDA} = +2.25V$ to $+5.5V$, $V_{DDB} - V_{GNDB} = +2.25V$ to $+5.5V$, $T_A = -40^\circ C$ to $+125^\circ C$, unless otherwise noted. Typical values are at $V_{DDA} - V_{GNDA} = +3.3V$, $V_{DDB} - V_{GNDB} = +3.3V$, $V_{GNDA} = V_{GNDB}$, $T_A = +25^\circ C$, unless otherwise noted.) (Note 4)

| PARAMETER | SYMBOL | CONDITIONS | | MIN | TYP | MAX | UNITS |
|--------------------------------|--------------------|--|--|-----|-----|-----|-------------|
| Common-Mode Transient Immunity | CMTI | IN_ = GND_ or VDD_ (Note 5) | | | 25 | | kV/ μ s |
| Maximum Frequency | f _{MAX} | | | | | 1.7 | MHz |
| Fall Time (Figure 1) | t _{FA} | I/OA_ = 0.9V _{DDA} to 0.9V | 4.5V ≤ V _{DDA} , V _{DDB} ≤ 5.5V, C _{LA} = 40pF, R _A = 1.6kΩ, C _{LB} = 400pF, R _B = 180Ω | | | 80 | ns |
| | | | 3.0V ≤ V _{DDA} , V _{DDB} ≤ 3.6V, C _{LA} = 40pF, R _A = 1kΩ, C _{LB} = 400pF, R _B = 120Ω | | | 65 | |
| | | | 2.25V ≤ V _{DDA} , V _{DDB} ≤ 2.75V, C _{LA} = 40pF, R _A = 810Ω, C _{LB} = 400pF, R _B = 91Ω | | | 55 | |
| | t _{FB} | I/OB_ = 0.9V _{DDB} to 0.1V _{DDB} | 4.5V ≤ V _{DDA} , V _{DDB} ≤ 5.5V, C _{LA} = 40pF, R _A = 1.6kΩ, C _{LB} = 400pF, R _B = 180Ω | | | 35 | |
| | | | 3.0V ≤ V _{DDA} , V _{DDB} ≤ 3.6V, C _{LA} = 40pF, R _A = 1kΩ, C _{LB} = 400pF, R _B = 120Ω | | | 45 | |
| | | | 2.25V ≤ V _{DDA} , V _{DDB} ≤ 2.75V, C _{LA} = 40pF, R _A = 810kΩ, C _{LB} = 400pF, R _B = 91Ω | | | 75 | |
| Propagation Delay (Figure 1) | t _{PLHAB} | I/OA_ = 0.5V _{DDA} to I/OB_ = 0.7V _{DDB} | 4.5V ≤ V _{DDA} , V _{DDB} ≤ 5.5V, C _{LA} = 0pF, R _A = 1.6kΩ, C _{LB} = 0pF, R _B = 180Ω | | | 20 | ns |
| | | | 3.0V ≤ V _{DDA} , V _{DDB} ≤ 3.6V, C _{LA} = 0pF, R _A = 1kΩ, C _{LB} = 0pF, R _B = 120Ω | | | 25 | |
| | | | 2.25V ≤ V _{DDA} , V _{DDB} ≤ 2.75V, C _{LA} = 0pF, R _A = 810Ω, C _{LB} = 0pF, R _B = 91Ω | | | 35 | |
| | t _{PHLAB} | I/OA_ = 0.5V _{DDA} to I/OB_ = 0.4V | 4.5V ≤ V _{DDA} , V _{DDB} ≤ 5.5V, C _{LA} = 0pF, R _A = 1.6kΩ, C _{LB} = 0pF, R _B = 180Ω | | | 80 | |
| | | | 3.0V ≤ V _{DDA} , V _{DDB} ≤ 3.6V, C _{LA} = 0pF, R _A = 1kΩ, C _{LB} = 0pF, R _B = 120Ω | | | 95 | |
| | | | 2.25V ≤ V _{DDA} , V _{DDB} ≤ 2.75V, C _{LA} = 0pF, R _A = 810Ω, C _{LB} = 0pF, R _B = 91Ω | | | 110 | |

Dynamic Characteristics (continued)

($V_{DDA} - V_{GNDA} = +2.25V$ to $+5.5V$, $V_{DDB} - V_{GNDB} = +2.25V$ to $+5.5V$, $T_A = -40^{\circ}C$ to $+125^{\circ}C$, unless otherwise noted. Typical values are at $V_{DDA} - V_{GNDA} = +3.3V$, $V_{DDB} - V_{GNDB} = +3.3V$, $V_{GNDA} = V_{GNDB}$, $T_A = +25^{\circ}C$, unless otherwise noted.) (Note 4)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|------------------------------|-------------|---|-----|-----|-----|-------|
| Propagation Delay (Figure 1) | t_{PLHBA} | $4.5V \leq V_{DDA}, V_{DDB} \leq 5.5V$, $C_{LA} = 0pF, R_A = 1.6k\Omega$, $C_{LB} = 0pF, R_B = 180\Omega$ | | | 25 | ns |
| | | $3.0V \leq V_{DDA}, V_{DDB} \leq 3.6V$, $C_{LA} = 0pF, R_A = 1k\Omega$, $C_{LB} = 0pF, R_B = 120\Omega$ | | | 25 | |
| | | $2.25V \leq V_{DDA}, V_{DDB} \leq 2.75V$, $C_{LA} = 0pF, R_A = 810\Omega$, $C_{LB} = 0pF, R_B = 91\Omega$ | | | 35 | |
| | t_{PHLBA} | $4.5V \leq V_{DDA}, V_{DDB} \leq 5.5V$, $C_{LA} = 0pF, R_A = 1.6k\Omega$, $C_{LB} = 0pF, R_B = 180\Omega$ | | | 115 | |
| | | $3.0V \leq V_{DDA}, V_{DDB} \leq 3.6V$, $C_{LA} = 0pF, R_A = 1k\Omega$, $C_{LB} = 0pF, R_B = 120\Omega$ | | | 115 | |
| | | $2.25V \leq V_{DDA}, V_{DDB} \leq 2.75V$, $C_{LA} = 0pF, R_A = 810\Omega$, $C_{LB} = 0pF, R_B = 91\Omega$ | | | 125 | |
| Pulse-Width Distortion | PWD_{AB} | $4.5V \leq V_{DDA}, V_{DDB} \leq 5.5V$ | | | 65 | ns |
| | | $3.0V \leq V_{DDA}, V_{DDB} \leq 3.6V$ | | | 65 | |
| | | $2.25V \leq V_{DDA}, V_{DDB} \leq 2.75V$ | | | 80 | |
| | PWD_{BA} | $4.5V \leq V_{DDA}, V_{DDB} \leq 5.5V$ | | | 95 | |
| | | $3.0V \leq V_{DDA}, V_{DDB} \leq 3.6V$ | | | 95 | |
| | | $2.25V \leq V_{DDA}, V_{DDB} \leq 2.75V$ | | | 100 | |

ESD Protection

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|-----------|--------|----------------------------|-----|---------|-----|-------|
| ESD | | Human body model, all pins | | ± 4 | | kV |

Note 1: All devices are 100% production tested at $T_A = +125^{\circ}C$. Specifications over temperature are guaranteed by design.

Note 2: All currents into the device are positive; all currents out of the device are negative. All voltages are referenced to ground on the corresponding side of the device, unless otherwise noted.

Note 3: This is the minimum difference between the output logic-low level and the input logic threshold. This ensures that there is no possibility of the part latching up the bus to which it is connected.

Note 4: Not production tested. Guaranteed by design.

Note 5: CMTI is the maximum sustainable common-mode voltage slew rate while maintaining operation. CMTI applies to both rising and falling common-mode voltage edges. Tested with the transient generator connected between GNDA and GNDB ($V_{CM} = 1000V$).

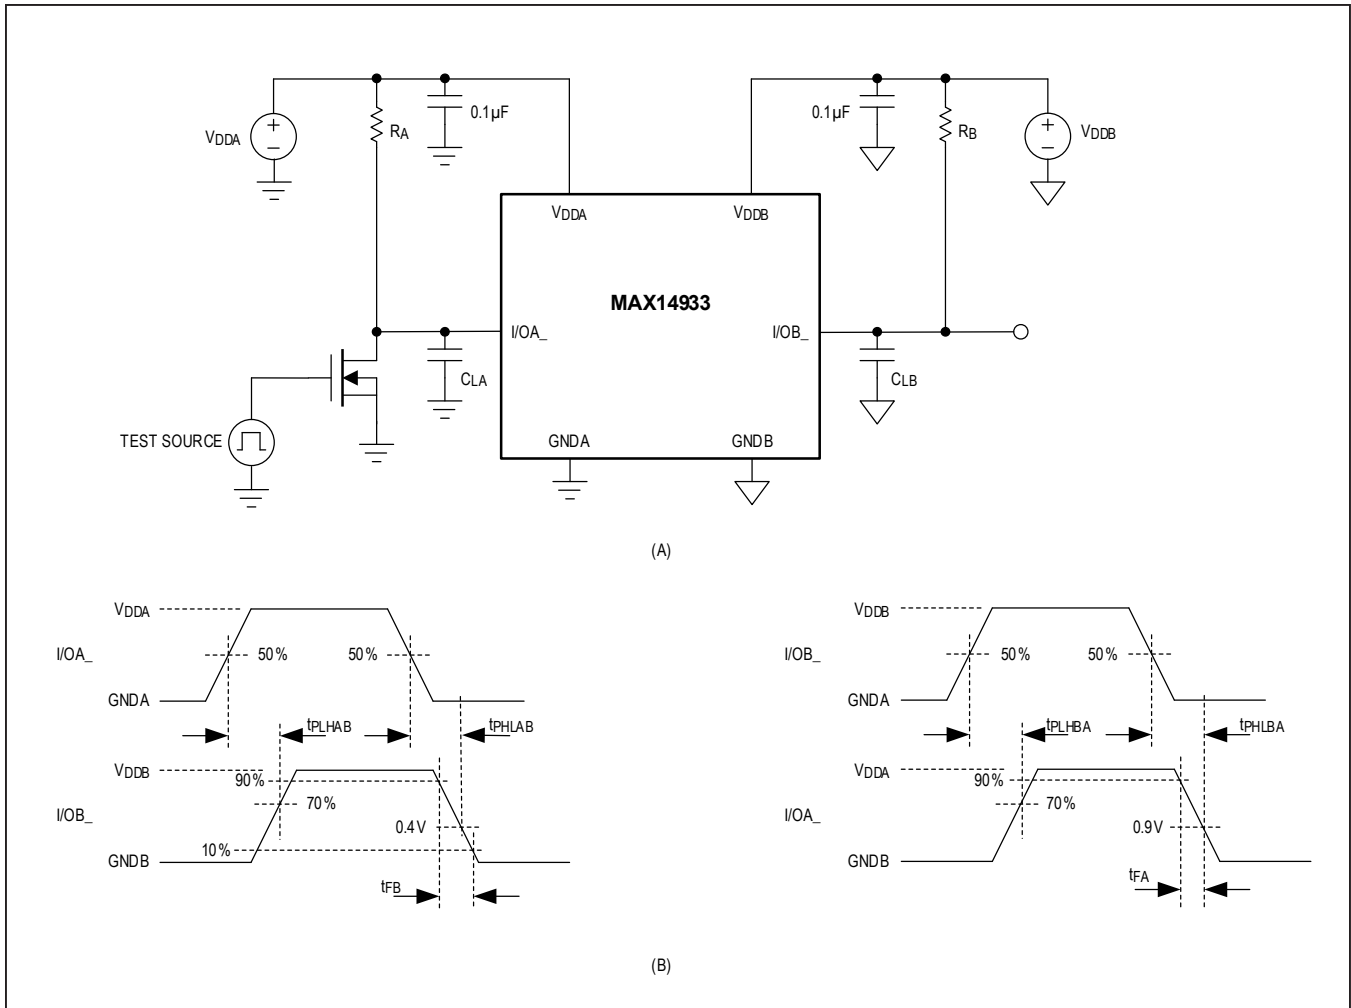


Figure 1. Test Circuit (A) and Timing Diagram (B)

Safety Regulatory Approvals

| |
|--|
| UL |
| The MAX14933 are certified under UL1577. For more details, refer to file E351759. |
| Rated up to 3750V _{RMS} isolation voltage for single protection. |
| cUL (EQUIVALENT TO CSA NOTICE 5A) |
| The MAX14933 are certified up to 3750V _{RMS} for single protection. For more details, refer to file E351759. |
| VDE |
| The MAX14933 are certified to DIN VDE V 0884-11: 2017-01. For details, see file ref. 5015017-4880-0001/272147/TL7/SCT. Basic Insulation, Maximum Transient Isolation Voltage 4600V _{PK} (Narrow SOIC) or 8400V _{PK} (Wide SOIC), Maximum Repetitive Peak Isolation Voltage 630V _{PK} (Narrow SOIC) or 1200V _{PK} (Wide SOIC) |

This coupler is suitable for "safe electrical insulation" only within the safety ratings. Compliance with the safety ratings shall be ensured by means of suitable protective circuits.

IEC Insulation Testing

| TUV |
|---|
| The MAX14933 are tested under TUV. |
| IEC 60950-1: Up to 630V _{PK} (443V _{RMS}) working voltage for basic insulation. |
| IEC 61010-1 (ed. 3): Up to 443V _{RMS} working voltage for basic insulation. For details, see Technical Report number 095-72100581-100. |
| IEC 60601-1 (ed. 3): For details, see Technical Report number 095-72100581-200. |
| Basic Insulation 1 MOOP, 630V _{PK} (443V _{RMS}) |
| Withstand Isolation Voltage (V _{ISO}) for 60s, 2750V _{RMS} |

MAX14933 Insulation Characteristics

| PARAMETER | SYMBOL | CONDITIONS | VALUE | UNITS |
|---|-------------------|--|--------------------|------------------|
| Partial Discharge Test Voltage | V _{PR} | Method B1 = V _{IORM} × 1.875 (t = 1s, partial discharge < 5pC) | 1182 | V _P |
| Maximum Repetitive Peak Isolation Voltage | V _{IORM} | (Note 6) | 630 | V _P |
| Maximum Working Isolation Voltage | V _{IOWM} | Continuous RMS voltage (Note 6) | 443 | V _{RMS} |
| Maximum Transient Isolation Voltage | V _{IOTM} | t = 1s (Note 6) | 4600 | V _P |
| Maximum Withstand Isolation Voltage | V _{ISO} | f _{SW} = 60Hz, duration = 60s (Note 6, 7) | 2750 | V _{RMS} |
| Maximum Surge Isolation Voltage | V _{IOSM} | Basic insulation, 1.2/50μs pulse per IEC 61000-4-5 (Note 6, 8) | 10 | kV |
| Insulation Resistance | R _{IO} | V _{IO} = 500V, T _A = 25°C | > 10 ¹² | Ω |
| | | V _{IO} = 500V, 100°C ≤ T _A ≤ 125°C | > 10 ¹¹ | |
| | | V _{IO} = 500V at T _S = 150°C | > 10 ⁹ | |
| Barrier Capacitance Side A to Side B | C _{IO} | f _{SW} = 1MHz (Note 9) | 2 | pF |
| Minimum Creepage Distance | CPG | Wide SOIC | 8 | mm |
| | | Narrow SOIC | 4 | |
| Minimum Clearance Distance | CLR | Wide SOIC | 8 | mm |
| | | Narrow SOIC | 4 | |
| Internal Clearance | | Distance through insulation | 0.015 | mm |
| Comparative Tracking Index | CTI | Material Group II (IEC 60112) | 575 | |
| Climatic Category | | | 40/125/21 | |
| Pollution Degree (DIN VDE 0110, Table 1) | | | 2 | |

Note 6: V_{ISO}, V_{IOTM}, V_{IOSM}, V_{IOWM}, and V_{IORM} are defined by the IEC 60747-5-5 standard.

Note 7: Products are qualified at V_{ISO} for 60s and 100% production tested at 120% of V_{ISO} for 1s.

Note 8: Devices are immersed in oil during surge characterization.

Note 9: Capacitance is measured with all pins on field-side and logic-side tied together.

Safety Limits

Damage to the IC can result in a low-resistance path to ground or to the supply and, without current limiting, the MAX14933 could dissipate excessive amounts of power. Excessive power dissipation can damage the die and result in damage to the isolation barrier, potentially causing downstream issues. [Table 1](#) shows the safety limits for the MAX14933.

The maximum safety temperature (T_S) for the device is the 150°C maximum junction temperature specified in the [Absolute Maximum Ratings](#). The power dissipation (P_D) and junction-to-ambient thermal impedance (θ_{JA}) determine the junction temperature. Thermal impedance values (θ_{JA} and θ_{JC}) are available in the [Package Information](#) section of the datasheet. Calculate the junction temperature (T_J) as:

$$T_J = T_A + (P_D \times \theta_{JA})$$

[Figure 2](#) to [Figure 3](#) show the thermal derating curves for the safety power limiting of the devices. [Figure 4](#) shows the thermal derating curve for the safety current limiting of the devices. Ensure that the junction temperature does not exceed 150°C.

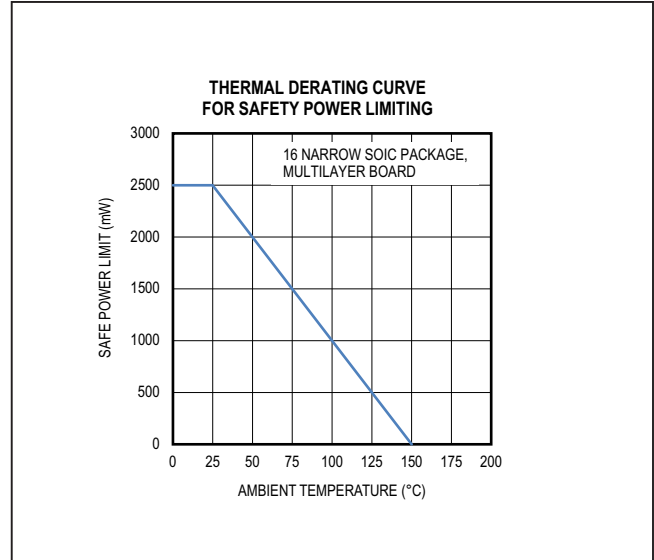


Figure 3. Thermal Derating Curve for Safety Power Limiting - Narrow SOIC

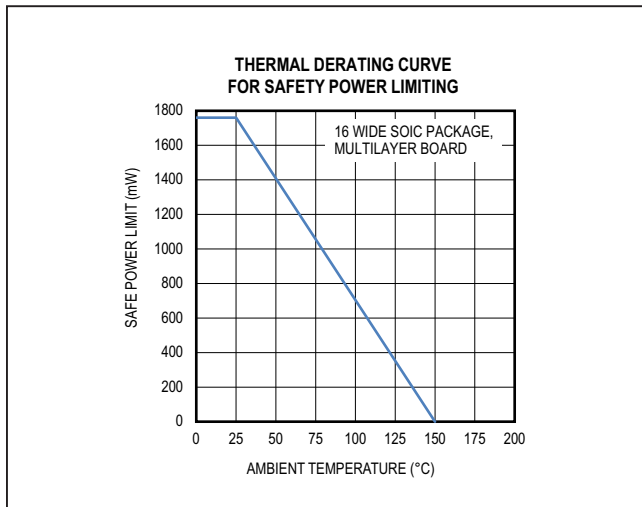


Figure 2. Thermal Derating Curve for Safety Power Limiting - Wide SOIC

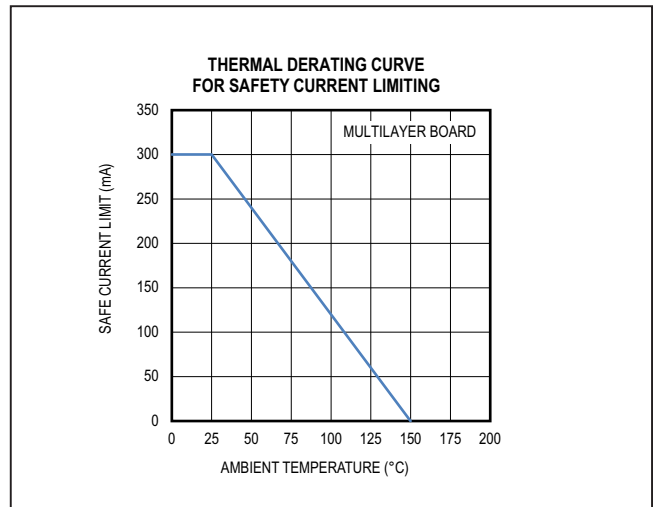








Figure 4. Thermal Derating Curve for Safety Current Limiting

Table 1. Safety Limiting Values for the MAX14933

| PARAMETER | SYMBOL | TEST CONDITIONS | MAX | UNITS | |
|--|----------------|---|-------------|-------|----|
| Safety Current on Any Pin (No Damage to Isolation Barrier) | I _S | T _J = 150°C, T _A = 25°C | 300 | mA | |
| Total Safety Power Dissipation | P _S | T _J = 150°C, T _A = 25°C | Wide SOIC | 1760 | mW |
| | | | Narrow SOIC | 2500 | |
| Maximum Safety Temperature | T _S | | 150 | °C | |







Typical Operating Characteristics

(V_{DDA} - V_{GNDA} = +3.3V, V_{DDB} - V_{GNDB} = +3.3V, V_{GNDA} = V_{GNDB}, T_A = +25°C, unless otherwise noted.)

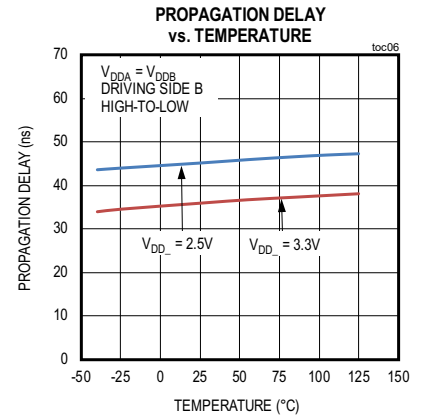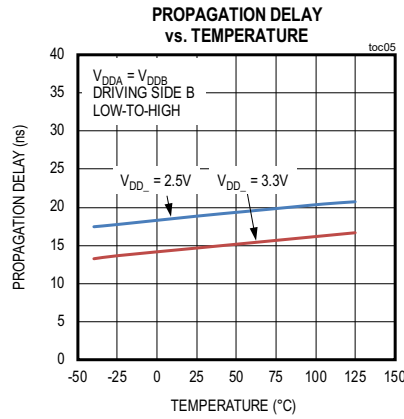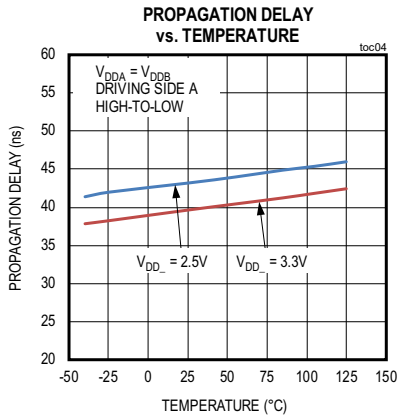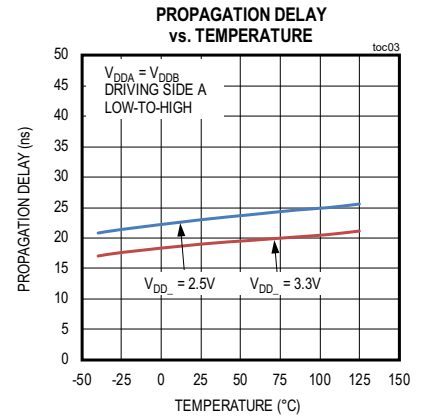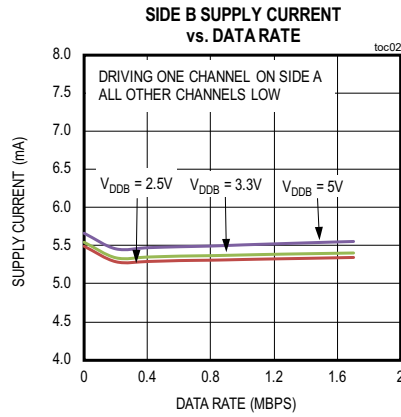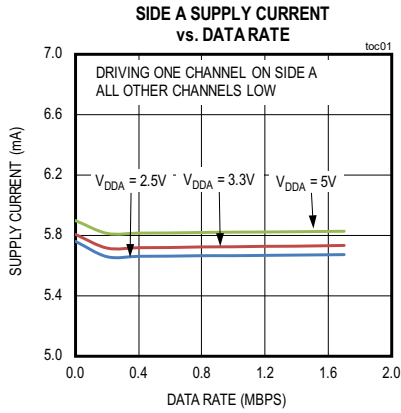


Typical Operating Characteristics (continued)

(V_{DDA} - V_{GNDA} = +3.3V, V_{DDB} - V_{GNDB} = +3.3V, V_{GNDA} = V_{GNDB}, T_A = +25°C, unless otherwise noted.)

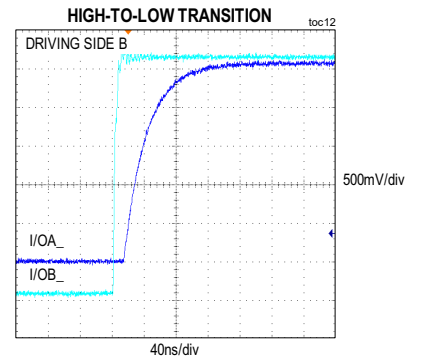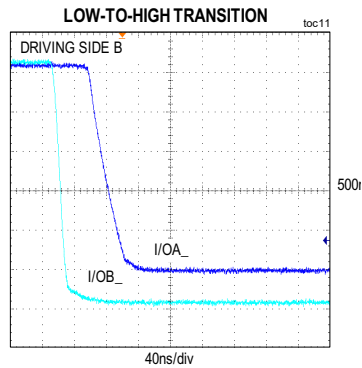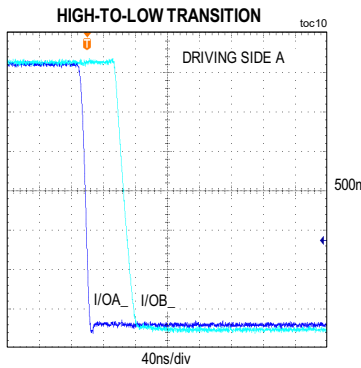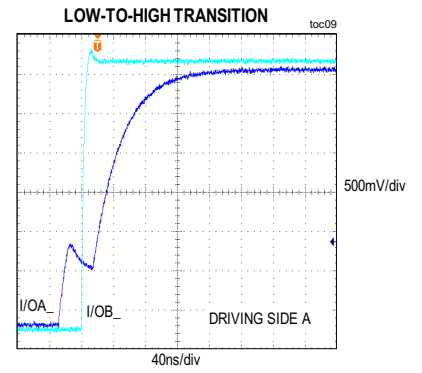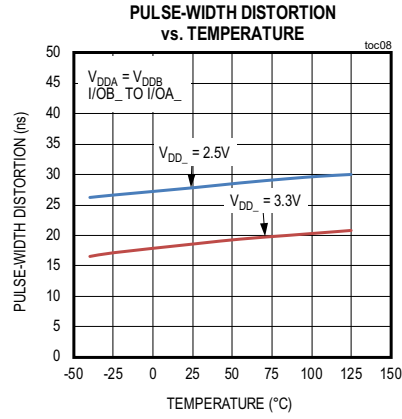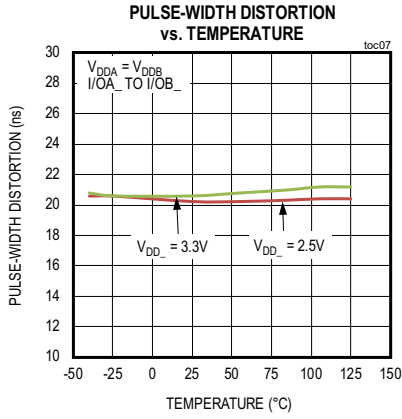


Pin Configuration

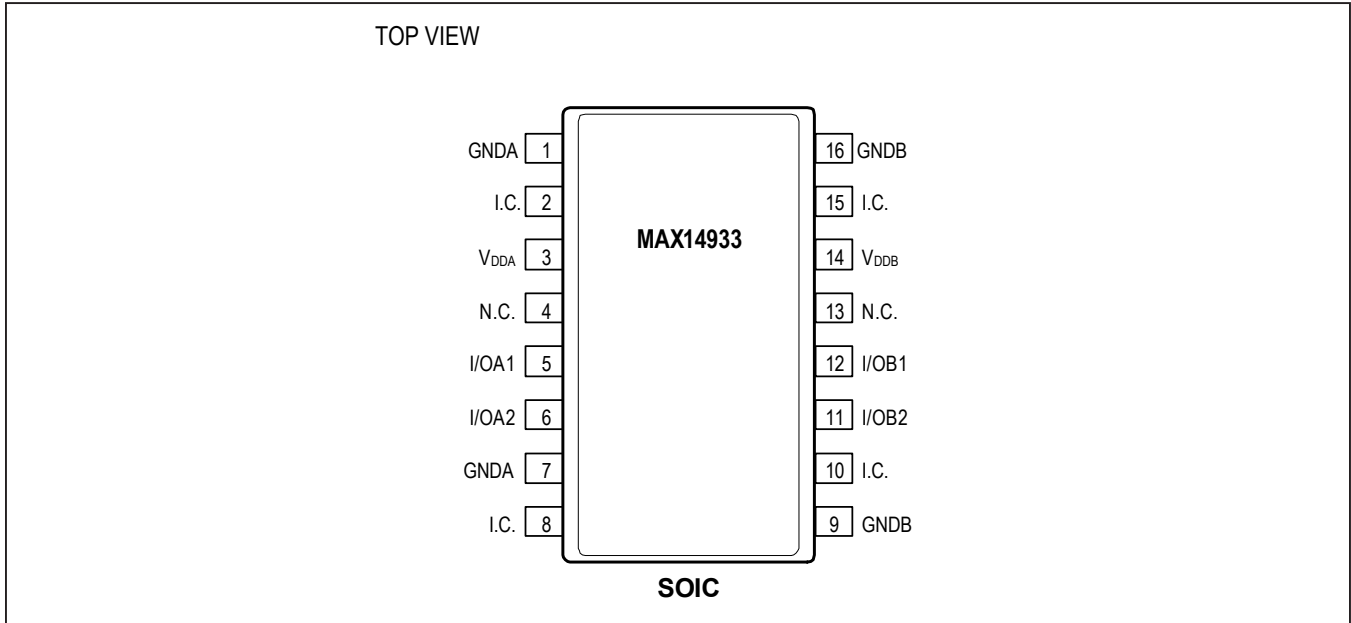

Pin Description

| PIN | NAME | FUNCTION | VOLTAGE RELATIVE TO |
|--------|------------------|--|---------------------|
| 1, 7 | GNDA | Ground Reference For Side A. Ensure both pins 1 and 7 are connected to GNDA. | — |
| 2, 8 | I.C. | Internally Connected. Connect to GNDA or leave unconnected. | GNDA |
| 4, 13 | N.C. | No Connection. Not internally connected. | — |
| 3 | V _{DDA} | Power Supply. Bypass V _{DDA} with a 0.1µF ceramic capacitor as close as possible to the pin. | GNDA |
| 5 | I/OA1 | Bidirectional Input/Output 1 On Side A. I/OA1 is translated to/from I/OB1 and is an open-drain output. | GNDA |
| 6 | I/OA2 | Bidirectional Input/Output 2 On Side A. I/OA2 is translated to/from I/OB2 and is an open-drain output. | GNDA |
| 9, 16 | GNDB | Ground Reference For Side B. | — |
| 10, 15 | I.C. | Internally Connected. Connect to GNDB or leave unconnected. | GNDB |
| 11 | I/OB2 | Bidirectional Input/Output 2 On Side B. I/OB2 is translated to/from I/OA2 and is an open-drain output. | GNDB |
| 12 | I/OB1 | Bidirectional Input/Output 1 On Side B. I/OB1 is translated to/from I/OA1 and is an open-drain output. | GNDB |
| 14 | V _{DDB} | Power Supply. Bypass V _{DDB} with a 0.1µF ceramic capacitor as close as possible to the pin. | GNDB |

Typical Application Circuit

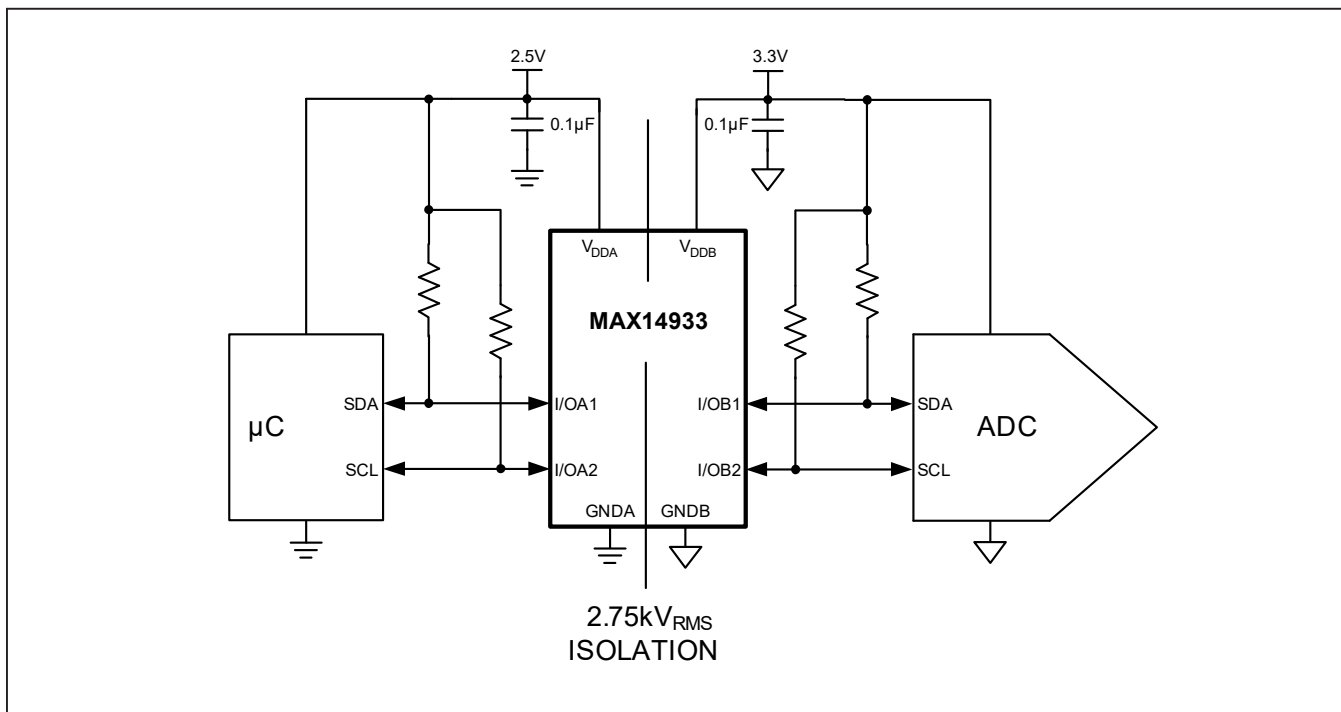

Detailed Description

The MAX14933 is a two-channel, 2.75kV_{RMS} I²C isolator utilizing Maxim's proprietary process technology. For applications requiring 5kV_{RMS} of isolation, refer to the MAX14937 data sheet. The device transfers digital signals between circuits with different power domains at ambient temperatures up to +125°C.

The device offers two bidirectional, open-drain channels for applications, such as I²C, that require data to be transmitted in both directions on the same line.

The device features independent 2.25V to 5.5V supplies on each side of the isolator. The device operates from DC to 1.7MHz and can be used in isolated I²C busses with clock stretching. The wide temperature range and high isolation voltage make the device ideal for use in harsh industrial environments.

Digital Isolation

The device provides galvanic isolation for digital signals that are transmitted between two ground domains. Up to 630V_{PEAK} of continuous isolation is supported, as well as transient differences of up to 2.75kV_{RMS} for up to 60s.

Bidirectional Channels

The device features two bidirectional channels that have open-drain outputs. The bidirectional channels do not require a direction control input. A logic-low on one side causes the corresponding pin on the other side to be pulled low while avoiding data latching within the device. I/OA1 and I/OA2 outputs comprise special buffers that regulate the logic-low voltage at approximately 0.7V. The input logic-low threshold (V_{IL}) of I/OA1 and I/OA2 is at least 50mV lower than the output logic-low voltage of I/OA1 and I/OA2. This prevents an output logic-low on side A from being accepted as an input low and subsequently transmitted to side B; thus, preventing a latching action. I/OB1 and I/OB2 are conventional outputs that do not regulate the logic-low output voltage.

Due to their nature, the A-side output buffers of the MAX14933 cannot be connected together, or to a device with similar buffers or rise-time accelerators. However, the B-side output buffers of the MAX14933 can be connected together, or to any other bidirectional buffer or level translator.

The I/OA1, I/OA2, I/OB1, and I/OB2 pins have open-drain outputs, requiring pullup resistors to their respective supplies for logic-high outputs. The output low voltages are guaranteed for sink currents of up to 30mA for side B, and 3mA for side A (see the [DC Electrical Characteristics](#) table). The device supports I²C clock stretching.

Startup and Undervoltage Lockout

The V_{DDA} and V_{DDB} supplies are both internally monitored for undervoltage conditions. Undervoltage events can occur during power-up, power-down, or during normal operation due to a sagging supply voltage. When an undervoltage event is detected on either of the supplies, all bidirectional outputs become high-impedance and are pulled high by the external pullup resistor on the open-drain outputs ([Table 2](#)). [Figure 5](#) through [Figure 8](#) show the behavior of the outputs during power-up and power-down.

Applications Information

Effect of Continuous Isolation on Lifetime

High-voltage conditions cause insulation to degrade over time. Higher voltages result in faster degradation. Even the high-quality insulating material used in the device can degrade over long periods of time with a constant high voltage across the isolation barrier.

Power-Supply Sequencing

The MAX14933 does not require special power-supply sequencing. The logic levels are set independently on either side by V_{DDA} and V_{DDB}. Each supply can be present over the entire specified range regardless of the level or presence of the other supply.

Power-Supply Decoupling

To reduce ripple and the chance of introducing data errors, bypass V_{DDA} and V_{DDB} with 0.1μF ceramic capacitors to GNDA and GNDB, respectively. Place the bypass capacitors as close as possible to the power-supply input pins.

Input/Output Capacitive Loads

For optimal performance, ensure that C_{LA} is ≤ 40pF and C_{LB} ≤ 400pF (see [Figure 1](#)).

Layout Considerations

The PCB designer should follow some critical recommendations in order to get the best performance from the design.

- Keep the input/output traces as short as possible. To keep signal paths low-inductance, avoid using vias.
- Have a solid ground plane underneath the high-speed signal layer.
- Keep the area underneath the MAX14933 free from ground and signal planes. Any galvanic or metallic connection between the Side A and Side B defeats the isolation.

Table 2. Output Behavior During Undervoltage Conditions

| V _{DDA} | V _{DDB} | V _{I/OA_} | V _{I/OB_} |
|------------------|------------------|--------------------|--------------------|
| Powered | Powered | 1 | 1 |
| Powered | Powered | 0 | 0 |
| Undervoltage | Powered | High-Z | High-Z |
| Powered | Undervoltage | High-Z | High-Z |

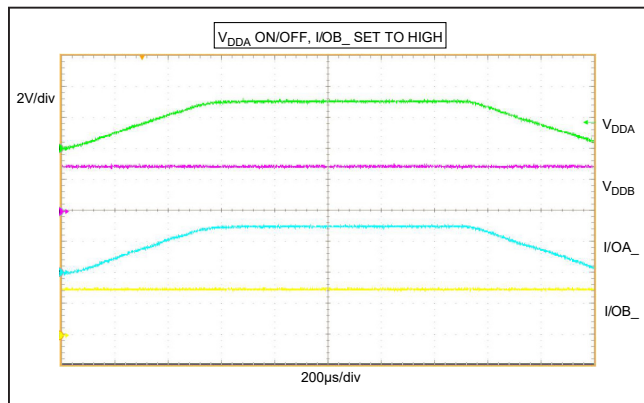


Figure 5. Undervoltage-Lockout Behavior (I/OB_ Set High)

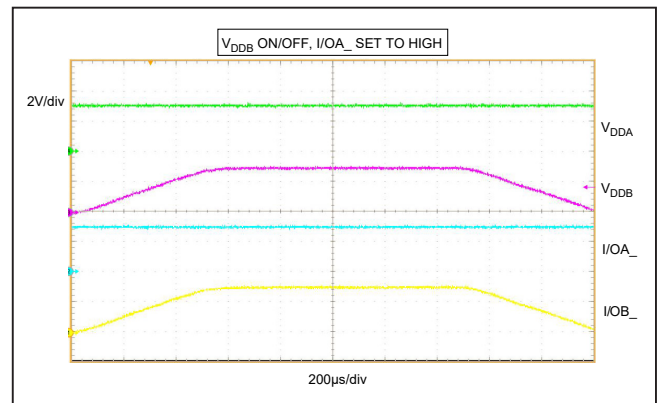


Figure 6. Undervoltage-Lockout Behavior (I/OA_ Set High)

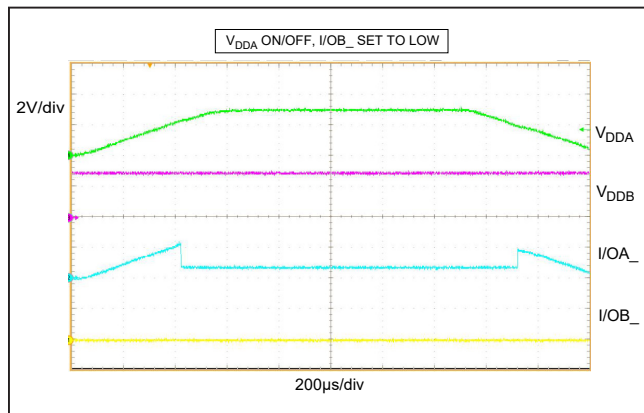


Figure 7. Undervoltage-Lockout Behavior (I/OB_ Set Low)

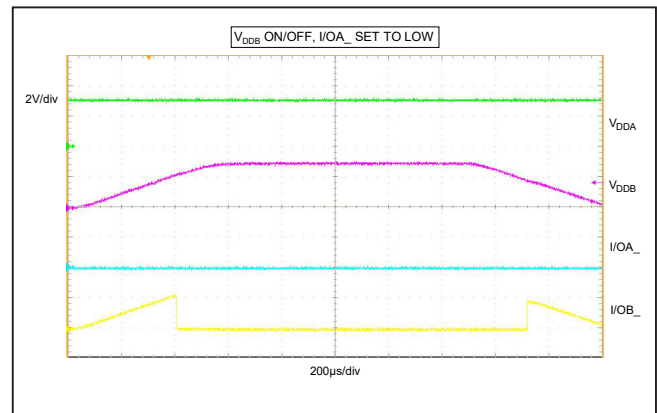


Figure 8. Undervoltage-Lockout Behavior (I/OA_ Set Low)

Ordering Information

| PART | TEMP RANGE | PIN-PACKAGE |
|--------------|-----------------|----------------|
| MAX14933AWE+ | -40°C to +125°C | 16 Wide SOIC |
| MAX14933ASE+ | -40°C to +125°C | 16 Narrow SOIC |

+Denotes a lead(Pb)-free/RoHS-compliant package.

Chip Information

PROCESS: BiCMOS

Revision History

| REVISION NUMBER | REVISION DATE | DESCRIPTION | PAGES CHANGED |
|-----------------|---------------|---|-------------------|
| 0 | 4/16 | Initial release | — |
| 1 | 5/16 | Added <i>IEC Insulation Testing</i> table | 1, 6 |
| 2 | 1/17 | Removed VDE pending and future product status of MAX14933 | 6, 14 |
| 3 | 11/19 | Updated the <i>General Description</i> , <i>Absolute Maximum Ratings</i> and <i>Package Information</i> sections, <i>ESD Protection</i> and <i>Safety Regulatory Approvals</i> tables, and replaced the <i>Bidirectional Channels</i> section | 1, 12 |
| 4 | 11/20 | Updated the <i>Safety Regulatory Approvals</i> , <i>Absolute Maximum Ratings</i> , <i>Dynamic Characteristics</i> , <i>Safety Regulatory Approvals</i> , <i>IEC Insulation Testing</i> , <i>Detailed Description</i> , and <i>Applications Information</i> ; replaced the <i>Insulation Characteristics</i> table, <i>Figure 1</i> ; added <i>Figures 2, 3, 4</i> and <i>Table 1</i> , and renumbered subsequent Figures and Tables | 1, 2, 4–8, 13, 14 |

For pricing, delivery, and ordering information, please visit Maxim Integrated's online storefront at <https://www.maximintegrated.com/en/storefront/storefront.html>.

Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time. The parametric values (min and max limits) shown in the *Electrical Characteristics* table are guaranteed. Other parametric values quoted in this data sheet are provided for guidance.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Analog Devices Inc.:](#)

[MAX14933ASE+](#) [MAX14933WEVKIT#](#) [MAX14933AWE+T](#)

Other:

[MAX14933ASE+T](#) [MAX14933AWE+](#)